

MR. FUNNEL

NEW RELEASE

REMOVES
WATER
& HARMFUL
DEBRIS

FUEL FILTER FUNNEL

Your Tool For Pure Fuel



Why Do I Need It?

Protect Your Engine

Dirt and water are practically unavoidable in stored fuel, causing microbial growth, corrosive acids, electrolysis and rust. These contaminants can plug filters, corrode components, decrease efficient combustion, and cause engine shutdown or system failure.

You can combat these problems by refueling with the Fuel Filter Funnel by Mr. Funnel. Protect your engine by using this innovative product every time you transfer fuel to your tank.



Made in USA



C = Conductive Black Model

NCO = Non-Conductive Orange Model


How Does It Work?

Unique Filter Technology

The Fuel Filter Funnel by Mr. Funnel is a heavy-duty, anti-static, and fast flow funnel with built-in filter technology.

When fuel is poured through the Fuel Filter Funnel, water and debris will not pass through the filter's fluoropolymer-coated stainless steel filter.

Only filtered fuel flows through to your engine, improving its efficiency, durability, and proper operation. The sump area collects the deflected water and debris for proper disposal. The Fuel Filter Funnel by Mr. Funnel will filter petrol, diesel, heating oil, kerosene and 2-cycle mixed fuel.

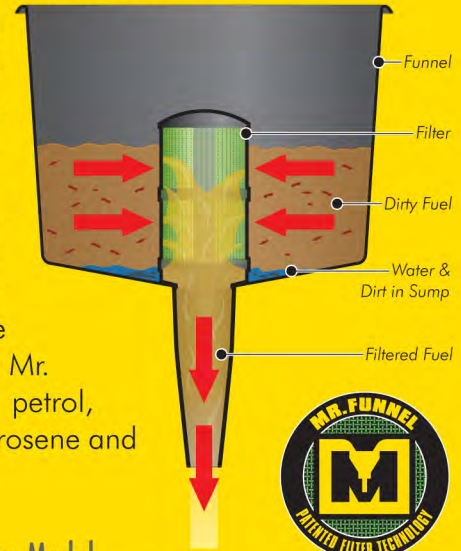




F1C

F3C

F8C

F15C

E3



part no. E3
description Flexible Extension

- Fill Fuel at any Angle
- Use with F3C Only

part no. F1C / F1NCO
height 15.2 cm
diameter 8.9 cm
flow rate 10L /minute



part no. F3C / F3NCO
height 22.9 cm
diameter 14 cm
flow rate 13L /minute



part no. F8C / F8NCO
height 25.4 cm
diameter 21.6 cm
flow rate 19L /minute



part no. F15C
height 25.4 cm
diameter 21.6 cm
flow rate 45L /minute



PRO QUIP

Pro Quip International


MR. FUNNEL FUEL FILTER FUNNELS

| DESCRIPTION | STOCK CODE | OUTER QTY | APN BARCODE | PRODUCT |
|--|------------|-----------|-----------------------|---------|
| BLACK CONDUCTIVE FUEL FILTER FUNNEL FLOW RATE 10L/minute HEIGHT 15.2cm DIAMETER 8.9cm | F1C | 12 | 07 8341 40 0001 8 | |
| ORANGE NON-CONDUCTIVE FUEL FILTER FUNNEL FLOW RATE 10L/minute HEIGHT 15.2cm DIAMETER 8.9cm | F1NCO | 12 | 07 8341 40 0031 5 | |
| BLACK CONDUCTIVE FUEL FILTER FUNNEL FLOW RATE 13L/minute HEIGHT 22.9cm DIAMETER 14cm | F3C | 12 | 07 8341 40 0003 2 | |
| ORANGE NON-CONDUCTIVE FUEL FILTER FUNNEL FLOW RATE 13L/minute HEIGHT 22.9cm DIAMETER 14cm | F3NCO | 12 | 07 8341 40 0033 9 | |
| BLACK CONDUCTIVE FUEL FILTER FUNNEL FLOW RATE 19L/minute HEIGHT 25.4cm DIAMETER 21.6cm | F8C | 6 | 07 8341 40 0008 7 | |
| ORANGE NON-CONDUCTIVE FUEL FILTER FUNNEL FLOW RATE 19L/minute HEIGHT 25.4cm DIAMETER 21.6cm | F8NCO | 6 | 07 8341 40 0038 4 | |
| BLACK CONDUCTIVE FUEL FILTER FUNNEL FLOW RATE 45L/minute HEIGHT 25.4cm DIAMETER 21.6cm | F15C | 4 | 07 8341 40 0015 5 | |
| FLEXIBLE EXTENSION FOR FUEL FILTER FUNNEL FILL FUEL AT ANY ANGLE USE WITH F3C ONLY | E3 | 12 | 07 8341 40 0043 8 | |

FUEL FILTER FUNNEL

Anti-Static Funnel with Fluoropolymer-Coated Stainless Steel Filtration

Made in USA

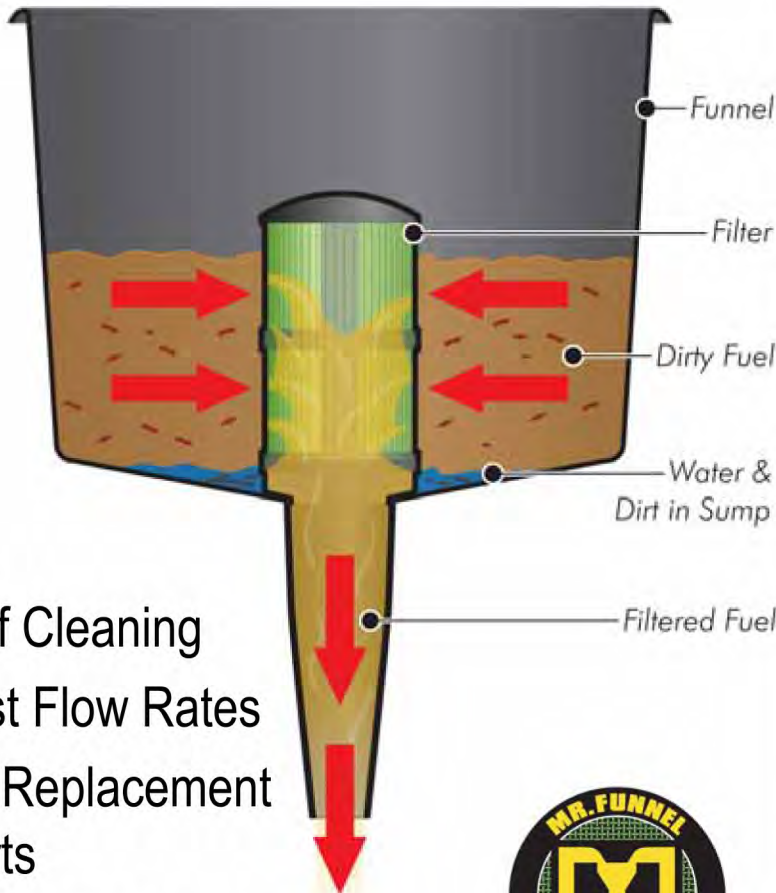

- Self Cleaning
- Fast Flow Rates
- No Replacement Parts
- Proven in Rugged Arctic Environment



How Does It Work?

Unique Filter Technology

The Fuel Filter Funnel by Mr. Funnel is a heavy-duty, anti-static*, and fast flow funnel with built-in filter technology.

When fuel is poured through the Fuel Filter Funnel, water and debris will not pass through the filter's fluoropolymer-coated stainless steel filter. Only filtered fuel flows through to your engine, improving its efficiency, durability, and proper operation.

The sump area collects the deflected water and debris for proper disposal.

The Fuel Filter Funnel by Mr. Funnel will filter petrol, diesel, heating oil, kerosene and 2-stroke mixed fuel.

**REMOVES
WATER
& HARMFUL
DEBRIS**

| model | F1 | F3 | F8 | F15 |
|-----------|---------|---------|---------|---------|
| height | 15.2cm | 22.9cm | 25.4cm | 25.4cm |
| diameter | 8.9cm | 14cm | 21.6cm | 21.6cm |
| flow rate | 10L p/m | 13L p/m | 19L p/m | 45L p/m |



MARINE



RECREATION



AUTOMOTIVE



INDUSTRIAL



AIRCRAFT



LAWN CARE





FUEL FILTER FUNNEL

Anti-Static Funnel with Fluoropolymer-Coated Stainless Steel Filtration

Made in USA

Safety Information

1. The Mr. Funnel Fuel Filter Funnel contains carbon injected into the raw materials allowing the funnel to conduct static electricity (Black Models Only). Grounding is an important safety feature, especially when handling fuel in marine and aviation applications. Please consult the owners manual of equipment to be filled for proper grounding instructions.
2. When properly used, the filter will separate free water from hydrocarbon fuels. Free water is the collection of H₂O molecules in the bottom of fuel cans or drums, formed when fuel is stored for any amount of time. Free water forms due to condensation in the air and/or the separation of water molecules from fuel. Water may be present in hydrocarbon fuels as free water or as an emulsion - small globules of water suspended in the fuel. Water may be emulsified in fuel by vibration or by emulsifying agents such as fuel additives, alcohol or detergents. The filter will not remove water emulsified in fuel. We recommend that you remove free water first by using the Mr. Funnel Fuel Filter Funnel, and then add such agents to your tank to emulsify any water that may have formed in the tank previously. If both water and hydrocarbon fuels are present in a container and the container is vibrating by shaking or by transporting in a vehicle (including an aircraft), water may be temporarily emulsified into fuel. Water emulsified in this manner will usually combine and settle out as free water in about five minutes after all vibration has ceased. When properly used, the filter will separate out free water along with rust and dirt from your fuel.
3. EXCESSIVE HEAD PRESSURE can force water through the funnel. If most of the filter is covered with water, the head pressure of a full funnel can force water through the filter. As water is observed collecting in the bottom of the funnel, or the flow rate begins to slow, stop refueling and dump the water/dirt out of the funnel and then continue. (See recommended test in #8, below).
4. DRY GAS (Alcohol) can emulsify and bind water. The filter cannot remove the bound water (See #2). Filter the fuel before adding dry gas. The filter will stop water from going into your tank; the dry gas will absorb moisture already present in your tank.
5. DO NOT ATTEMPT TO REMOVE THE FILTER FROM THE FUNNEL. The filter is permanently attached to the funnel. This exclusively engineered product will only work in it's stock form.
6. The Mr. Funnel Fuel Filter Funnel is designed to work with gasoline, kerosene, diesel and aviation fuels. CAUTION: Use of the Fuel Filter for any other substance may result in damage to the filter, and voiding your Warranty.
7. CAUTION AVIATION USERS: For aviation use, the purpose of this funnel is to facilitate the transfer and inspection of fuel for contamination in the form of solids (down to .0029" or 74 micron on the F15 model) and free water. If contamination is found, drain tanks or take appropriate corrective action. Always check the aircraft fuel sumps for water prior to your next flight.
8. Test the Fuel Filter Funnel before each use. Add enough water to the funnel to cover the bottom 1/3 of the filter. This amount of water should not pass through the filter and proves it is working as designed. More than this amount will cause water to pass through the filter due to the additional head pressure caused by the mass of the excess water.
9. CAUTION: DO NOT OVERFILL! For safe refueling in marine applications, always follow Marine Safety Regulations. Know how much additional fuel your tank can hold and only fuel up to 95% of its capacity, which will allow for fuel expansion.
10. Always check your Fuel Filter Funnel for damage before each use.



**PRO
QUIP**